

## Header Panel 1/4" thick aluminum panel with stencil-cut header pattern, painted on all sides. Panel is mounted onto Directory Cabinet top with aluminum angles and mechanical fasteners. ← Coffman St Parking Lots **Directory Cabinet** 3 1/4" thick fabricated aluminum cabinet Longmont Public Library → with internal structure painted on all Kimbark St Parking Lots sides, mounted central to aluminum tube post with mechanical fasteners. (C1)— 1" Text (V1) (T1) 3'-6" AlpinaTM 1.75" FlipUpTM Snap Frame 2'-7" Map/Directory (Frame 2 FF-RP, Security Option 1) - Anodized Aluminum - Round Profile - Anti-Tamper Screw Down Security 2'-6" high x 1'-6" wide x 1/8" thick matte acrylic with UV fade resistant graphics printed directly to second surface & anti-graffiti film applied to first surface Side A/B: Map/Directory 2'-4 1/2"

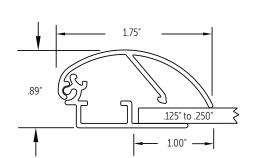

FRAME PROFILE NOT TO SCALE

## **GENERAL NOTES**

- 1. Sign contractor shall be responsible for design and engineering of supports, anchors and miscellaneous steel or metal required for installation.
- 2. The sign contractor's structural engineer shall be licensed in the State of Colorado and certify all connections and support details.
- 3. Isolate dissimilar materials as required.
- 4. Field dimensions shall be taken by the sign contractor prior to preparation of shop drawings and fabrication wherepossible. It is the responsibility of the sign contractor to site verify all sign locations for accuracy, fit, and potential obstacles. Sign contractor shall notify appropriate person(s) of any issues, discrepancies and potential obstacles per the attached Performance Specifications, contract or specified communication
- 5. It is the responsibility of the sign contractor to contact appropriate organizations to verify locations of underground utilities.
- 6. Sign contractor must obtain all permits and field inspection approvals necessary to complete work per City requirements. All sign locations need to be located and staked by sign contractor and approved by the City prior to installation.
- 7. Masonry dimensions are approximate; sign contractor to verify and adjust as needed. Final dimensions must appear on shop drawings for review and approval.
- 8. Sign contractor must clean and seal masonry to prevent moisture, discoloration and other defects due to weather and environmental conditions.
- 9. Sign contractor must submit brick, stone, and mortar samples for review and approval.
- 10. Sign contractor shall follow any additional requirements presented in the attached Performance Specifications and Design Intent Documents.
- 11. General: All painted surfaces to receive anti-graffitti UV clear coat protectant.

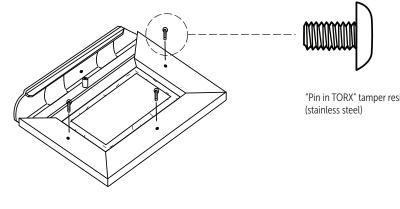



"Pin in TORX" tamper resistant screws

**SECURITY DETAIL** NOT TO SCALE

date 05.13.22 Guide

13110 Shaker Square, Suite 101 Cleveland, Ohio 44120 guidestudio.com design K. Fromet

contact

C. Fromet

project LON1693

4" round aluminum post

Footing to be engineered by sign fabricator

Direct burial in concrete

City of Longmont

Downtown Wayfinding Program

phase 100% Design Intent revision 0

Pedestrian Kiosk - Small Sign Type G1

These drawings and notes are for the sole purpose of expressing visual design intent and are not intended for actual fabrication purposes. Sign Contractor accepts total responsibility for final material selection, fabrication and installation methods. Electronic files are not coonstruction documents and cannot be relied upon as identical to construction documents because of changes or errors induced by translation, transmission, or alterations while under the control of others. Use of information contained in the electronic files is at the user's sole risk and without liability to Design Professional and its consultants. Refer to provided performance Specifications for details on designer expectations of Fabricator and fabrication process. Copyright © Guide Studio, Inc. All rights reserved.